
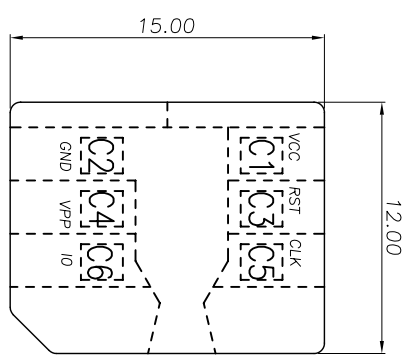
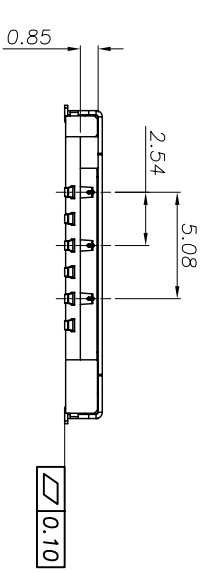
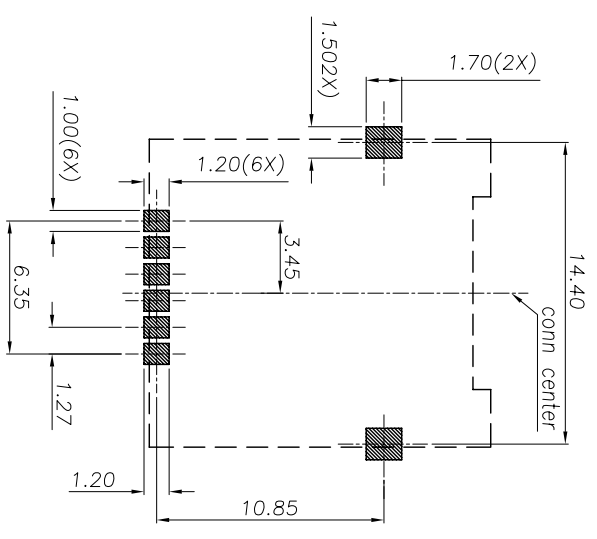
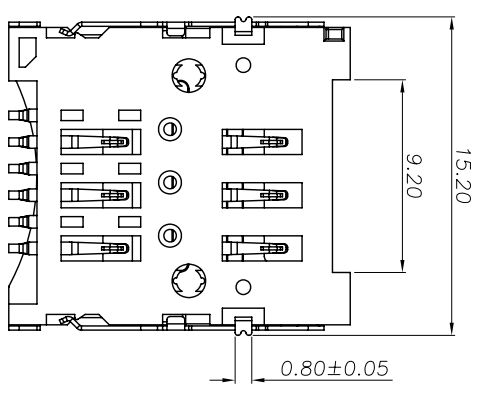
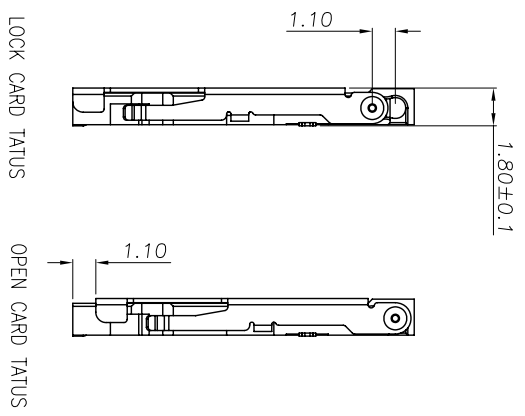


Rev No.	Description of Revision	Date	Name	Approved	ECN No.
A					

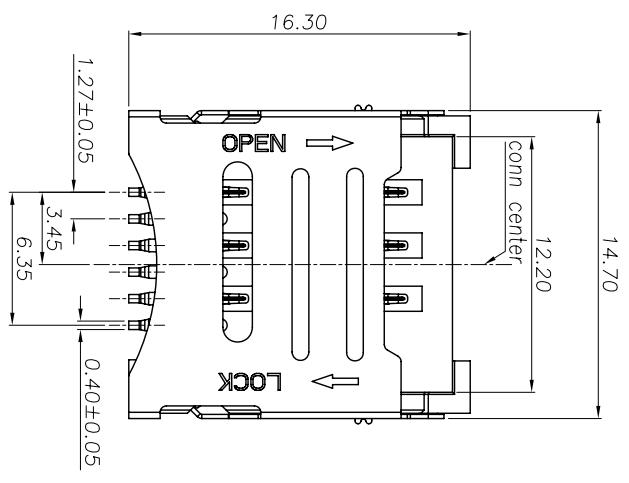


MICRO SIM

PIN NO.	NAME	PIN NO.	NAME
C1	VCC	C4	VPP
C2	GND	C5	CLK
C3	RST	C6	I/O

RECOMMENDED PCB LAYOUT(Top View)
GENERAL TOLERANCE ±0.05

NOTES:

- ELECTRICAL CHARACTERISTICS
 - CONTACT RESISTANCE: 60 Milliohms Max
 - INSULATION RESISTANCE: 1,000 Megohms Min.
 - VOLTAGE RATING: 50V.
 - CURRENT RATING: 1.0A.
- MECHANICAL CHARACTERISTICS
 - OPERATION TEMPERATURE RANGE: -20°C~+85°C
 - DURABILITY: 5000 CYCLES
- MATERIAL:
 - HOUSING: THERMOPLASTIC, UL 94-V0
 - TERMINAL: PHOSPHOR BRONZE, T=0.15
 - SHELL: STAINLESS STEEL, T=0.20
- FINISHED:
 - TERMINAL: Ni PLATED UNDER, 3U" Au MIN PLATED ON CONTACT AREA, AU PLATED ON SOLDER TAIL
 - SHELL: Ni PLATED UNDER, G/F PLATED ON SOLDER TAIL

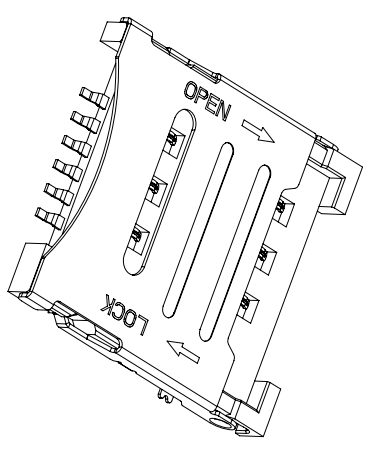

UNLESS OTHERWISE SPECIFIED TOLERANCES		TITLE:	
DECIMALS:	ANGLES	MICRO SIM CARD 1.8H 掀盖客户图	
X. ±0.20	X. ±2°	Dr:qwr	LUCHUN
XX ±0.15	XX ±1°	Checked:	LUCHUN
XXX ±0.10	XXX ±0.5°	Approved:	JACK.D
X.XXX ±0.05		PART NO. SIM006-018F-MINI	
		SCALE: 1:1	UNIT: mm
		SIZE: A4	SHEET: 1 OF 1
		REV: A	PROJ: A

深圳市文章济美科技有限公司

CUSTOMER COPY