
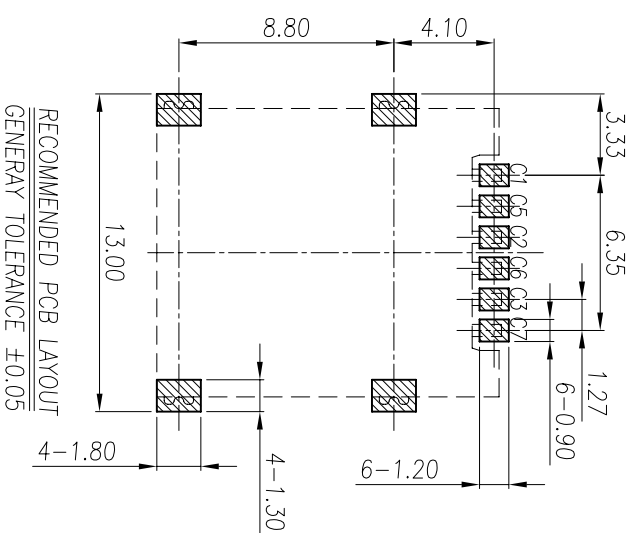
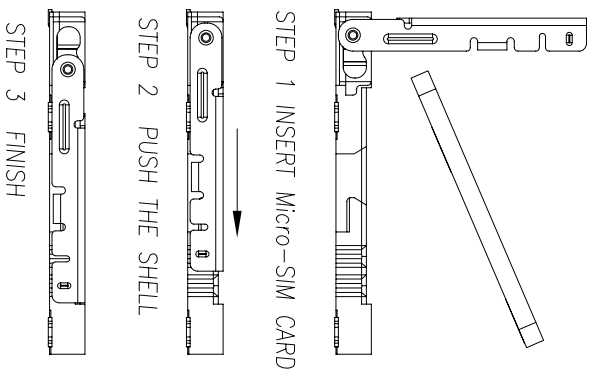


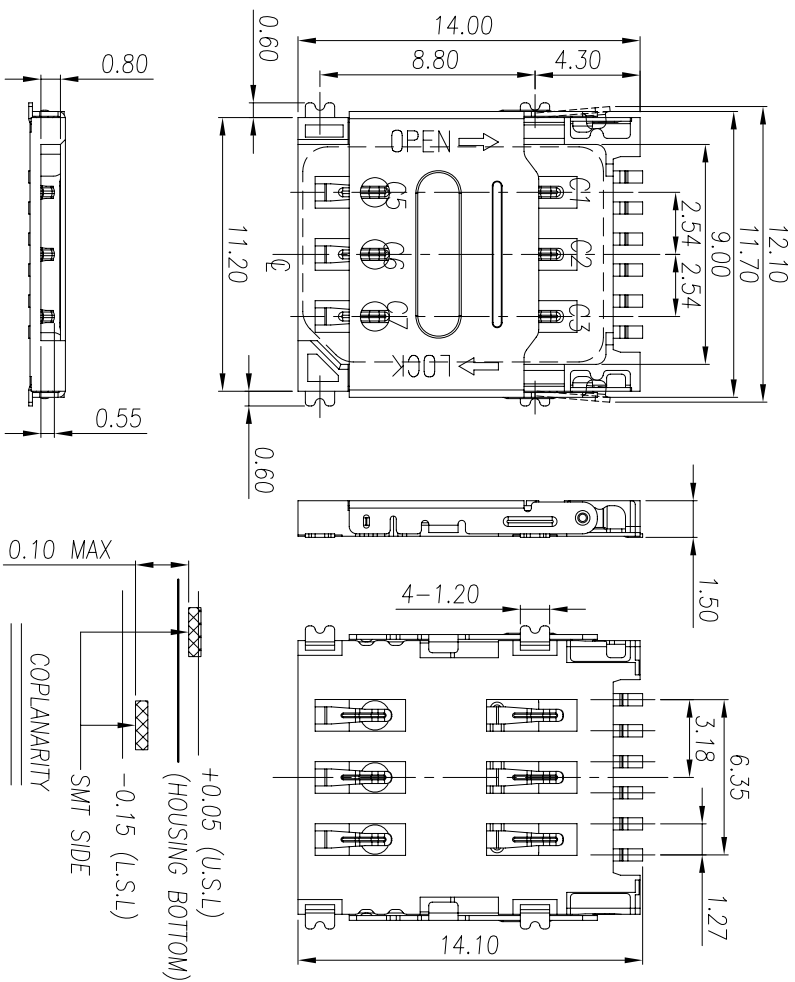

NOTES:

1. ELECTRICAL CHARACTERISTICS


- 1-1. CONTACT RESISTANCE: 60 Milliohms Max
 - 1-2. INSULATION RESISTANCE: 1,000 Megohms Min.
 - 1-3. VOLTAGE RATING: 50V.
 - 1-4. CURRENT RATING: 1.0A.
2. MECHANICAL CHARACTERISTICS
- 2-1. OPERATION TEMPERATURE RANGE: -20°C~+85°C
 - 2-2. DURABILITY: 5000 CYCLES

3. MATERIAL:

- 3-1. HOUSING: THERMOPLASTIC, UL 94-V0
 - 3-2. TERMINAL: PHOSPHOR BRONZE, T=0.15
 - 3-3. SHELL: STAINLESS STEEL, T=0.20
4. FINISHED:

4-1. TERMINAL: NI PLATED UNDER, 3U" Au MIN PLATED ON CONTACT AREA, AU PLATED ON SOLDER TAIL

SIM CARD	
Pin No.	NAME
C1	VCC
C2	RST
C3	CLK
C5	GND
C6	VPP
C7	I/O

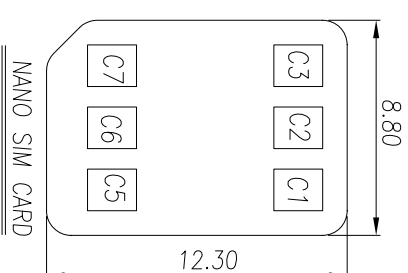

UNLESS OTHERWISE SPECIFIED TOLERANCES		TITLE
DECIMALS:	ANGLES	NANO SIM 1.50H 掀盖式卡座

深圳市文章济美科技有限公司

X.	±0.20	X'.	±2°	Drawn LITCHIN	PART NO.	SIM022-15001-01	UNIT	mm	PROJ.	1 OF 1
X.X	±0.15	X.X'	±1°	Checked LITCHIN	SCALE	3:10	SHEET	REV.	A	
X.XX	±0.10	X.XX'	±0.5°	Approved LITCHIN	SIZE	A4				
X.XXX	±0.05									