

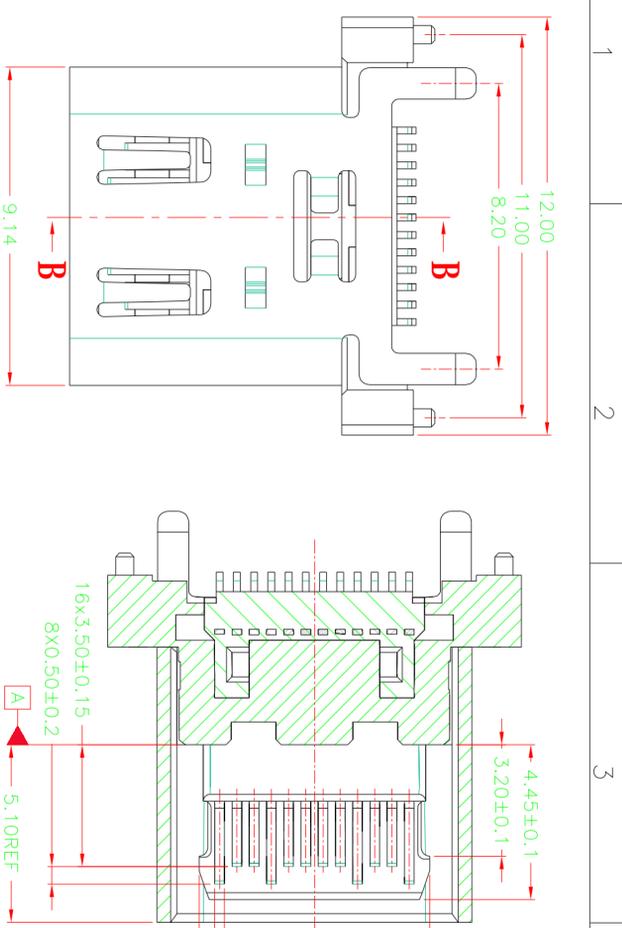
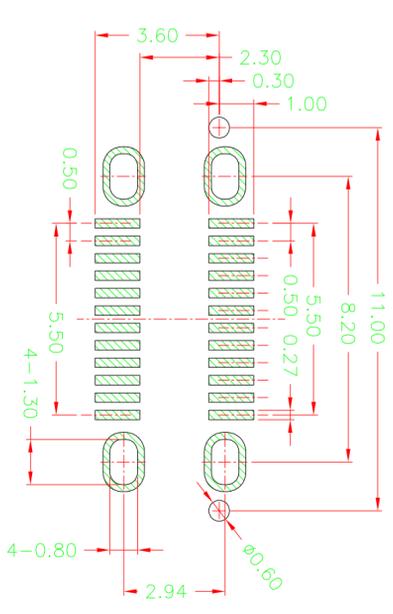



REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
A	---	新版本发行	DMX	DMX	2017.03.21

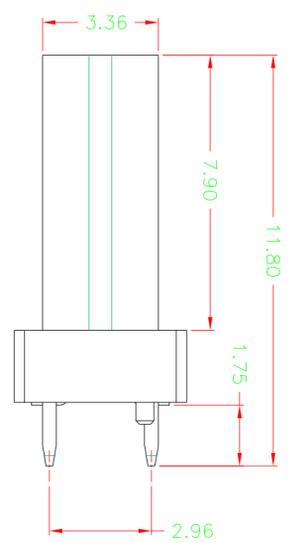

PIN	SIGNAL NAME	PIN	SIGNAL NAME
A1	GND	B12	GND
A2	SSTXP1	B11	SSRXP1
A3	SSTXN1	B10	SSRXN1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXN2	B3	SSTXN2
A11	SSRXP2	B2	SSTXP2
A12	GND	B1	GND




- NOTES:
SPECIFICATION:
- CURRENT RATING: 3.0A MAX
 - VOLTAGE: 100 VAC
 - TEMPERATURE RANGE: -30 °C ~ 85 °C
 - CONTACT RESISTANCE: 40 MILLIONHM MAX
 - INSULATION RESISTANCE: 100 MEGOHMS MIN.
 - INSERTION FORCE : 5N~20N
 - UNMATING FORCE: 8N~20N
 - DURABILITY: 10,000 CYCLES

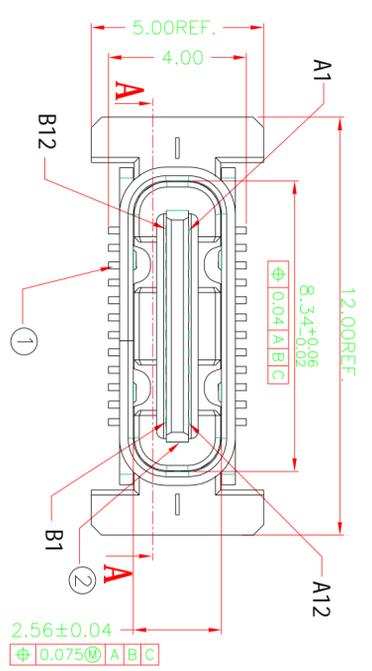

RECOMMENDED P.C.B. LAYOUT (T:1.00mm)
TOLERANCE UNSPECIFIED ±0.05mm

料号对照表

料号	电镀规格
014101020-097	端子Au: 3u"Min
014101050-097	端子Au: 30u"Min

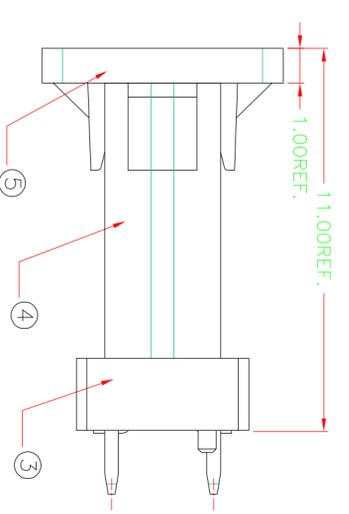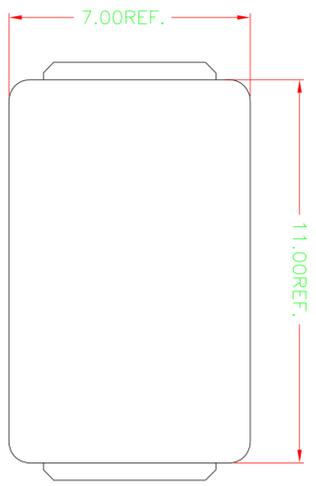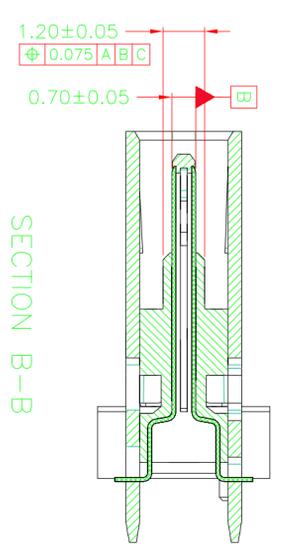

NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
1	TERMINAL HOUSING	C18140 T=0.12	CONTACT AREA:GOLD 30u" SOLDER AREA: G/F UNDER PLATING:IN 50u" LIQUID SEALING	2SET
2	MID PLATE	SUS 301 T=0.20	NO PLATED	1PCS
3	INSULATOR	LCP S475	BLACK	1PCS
4	SHELL	SUS 304 T=0.40	NI PLATED	1PCS
5	COVER	LCP 6007AS	BLACK	1PCS

TOLERANCE		NAME (INTENDED USE) CUSTOMER DRAWING		TITLE:	
X.X	±0.30 X.°	± 2°	PART NO.	深圳市文章济美科技有限公司	
.XX	±0.20 .X°	± 1°	5001-0141010X0-097	USB C F 直立四脚插板 CONN.	
.XXX	±0.10 .XX°	±0.5°	APPD:	DRAWG NO. 0141-0970	
UNITS	mm		CHED:	SCALE	SHEET
MATERILA			DRAW:	1:1	1/1
FINISH				REV.	A