
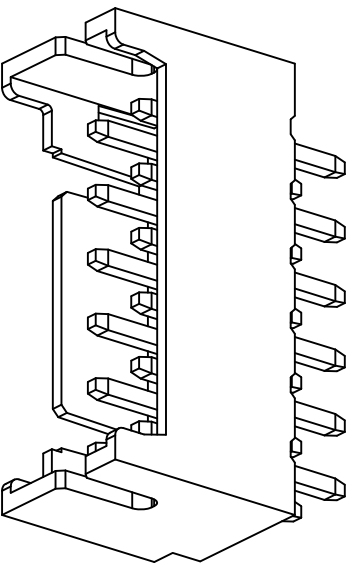
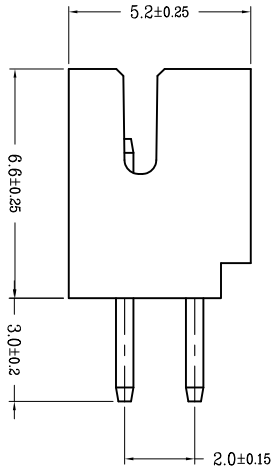
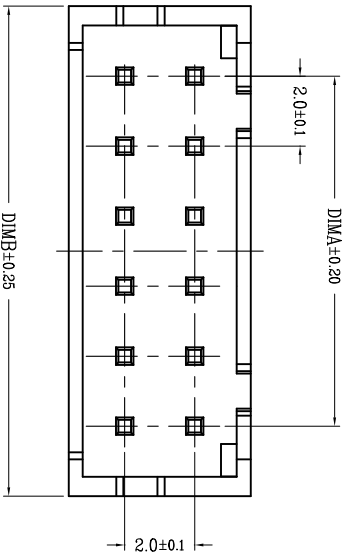


D		E		F	
版次	变更摘要	日期	序号	品名	材质
0	新产品发行	2018/09/16			

①	PHD2.0 重针 WTB 胶芯	PA66 UL94V-0 米色
②	PHD2.0 重针 WTB 端子	铜合金/表面镀锡

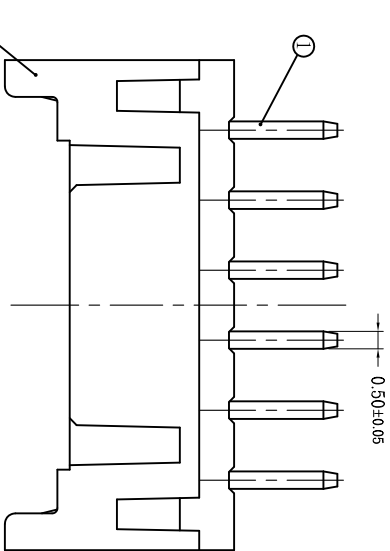


CKT	A	B
2*2	2.0	6.0
2*3	4.0	8.0
2*4	6.0	10.0
2*5	8.0	12.0
2*6	10.0	14.0
2*7	12.0	16.0
2*8	14.0	18.0
2*9	16.0	20.0
2*10	18.0	22.0
2*11	20.0	24.0
2*12	22.0	26.0
2*13	24.0	28.0
2*14	26.0	30.0
2*15	28.0	32.0
2*16	30.0	34.0
2*18	34.0	38.0
2*20	38.0	42.0

技术指标(Technical Index):

1. 工作温度 (Temperature range): -25° C~+85° C.
2. 额定电压 (Rated voltage): 250V DC/AC(rms).
3. 额定电流 (Rated current): 3.0A AC, DC.
4. 接触电阻 (Contact resistance): ≤20mΩ.
5. 耐压值 (Dielectric withstanding voltage): 800V AC/minute.
6. 绝缘电阻 (Insulation resistance): ≥1000MΩ.
7. 产品料号 (Product material No.): 5001 - PHD 020 C - ** P 1

JM CONNECTOR SERIES
PITCH: 2.0
C: 直插
ALTERNATE
PACKING: P: 袋

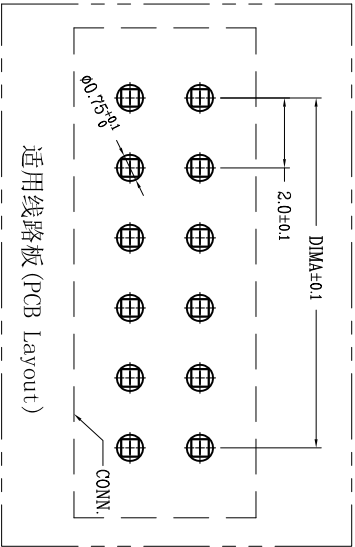

深圳市文章济美科技有限公司

品名 (TITLE)		制图 (DRA)	
PHD2.0 双排直插 WTB		Anlan	
料号 (DRAWING)		校对 (CHECK)	
5001-PHD020C-**-P1-00		王涛	
比例 (SCALE)		审核 (APPD)	
1:1		黄志明	
单位 (UNITS)		张数 (SHEET)	
mm		1 Of 1	
		SIZE	
		A4	
		REV	
		A	



一般公差 (TOLERANCE)
X ±.50 XX ±.10
ANGLES ±1°